

3E-34N SERIES - 1/15 HP

APPLICATIONS

Dual purpose oil-filled pump that may be used totally submersed or in-line (fed with pipe or hose). For commercial, industrial and home applications including statuary fountains, water displays, air conditioners, machine tool coolants, and many other applications where liquid must be transferred or recirculated. This compact 300 GPH pump features a 1/4" MNPT discharge and 11.8' shut-off head capability.

FEATURES

- For submersed or in-line use
- Epoxy-coated die-cast aluminum housing
- Oil-filled motor
- 20.3' maximum lift
- 208 watts
- 1/2" MNPT discharge
- Thermal overload protection



3E-34N




SERIES SPECIFICATIONS

Model No.	Item No.	Discharge	Intake	HP	Volts	Hz	Amps	Watts	Performance (GPH@Head)				Shutoff		Cord Length (ft)	Weight (lbs.)
									1'	3'	5'	10'	Ft	PSI		
3E-34N	503603	1/2" MNPT	3/4" MNPT	1/15	115	60	3.2	200	670	650	575	460	20.3	8.8	10	4.83


SMALL SUBMERSIBLE PUMPS

3E-34N SERIES - 1/15 HP

ENGINEERING DATA

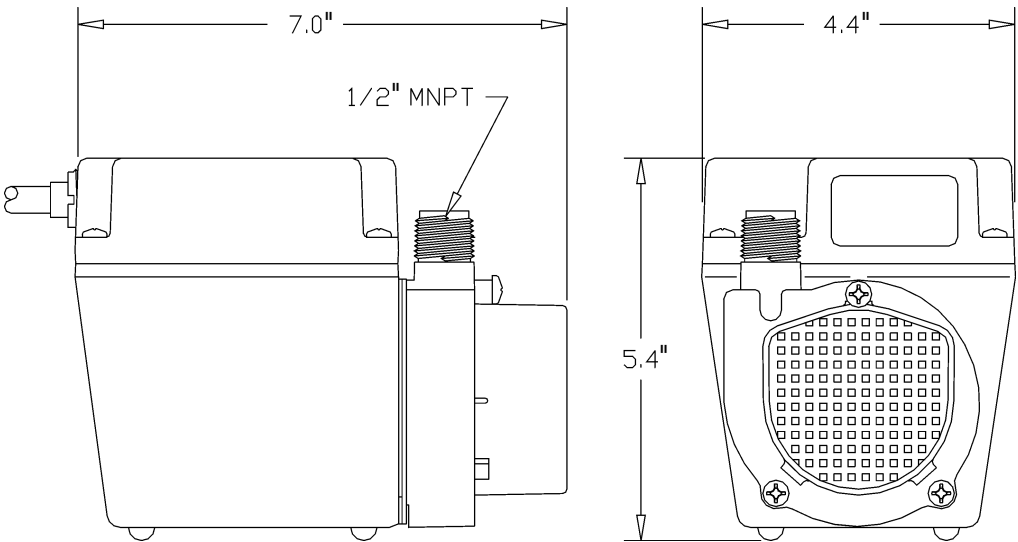

PERFORMANCE DATA

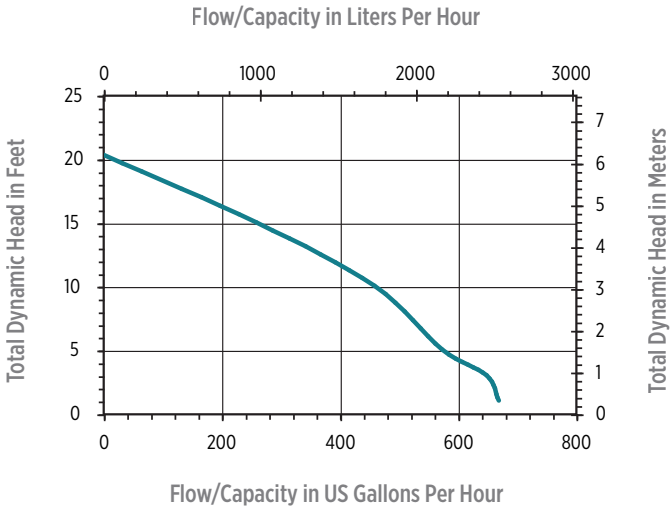

REPLACEMENT PARTS

Volute	103337
Impeller	103437
Screen	102376
Gasket	103601

